




IPS & DIPS Bell MJ Adapter With Kit Connects HDPE to Plain End Ductile Iron or PVC (Dimensions in Inches)

This kit enables HDPE pipe to be fitted with a bell end in order to accept ductile iron pipe or DIPS OD PVC pipe (can also accept sizes 2” through 16” IPS OD PVC pipe by using a transition gasket)*.

This fitting eliminates the need for a ductile iron solid sleeve when making this connection. Bell MJ Adapters are fully pressure rated for DR ordered and are AWWA compliant at no extra charge.

- Kit includes the HDPE Bell MJ fitting with stainless steel reinforcing collar, C-153 (2”-12”) or C-110 (14”-24”) heavy body ductile iron gland ring, gasket and extra length T-bolts**.
- Retaining glands are available for ductile iron pipe or PVC pipe and are sold separately. IPS transition gaskets are also available through 16” and sold separately.

(See following page for Bell Adapter accessories.)

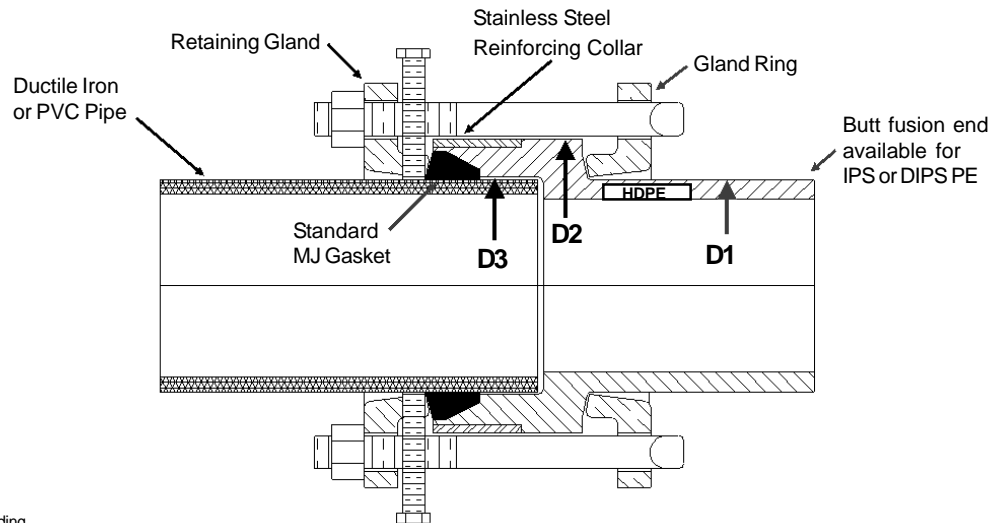

Patent application pending

Nominal Size IPS & DIPS	D1 IPS	D1 DIPS	D2	D3	OAL
2"	2.38	2.50	3.50	2.56	8.00
3"	3.50	3.96	5.56	4.06	8.50
4"	4.50	4.80	6.63	4.93	8.63
6"	6.63	6.90	8.63	7.03	10.25
8"	8.63	9.05	10.75	9.15	12.00
10"	10.75	11.10	12.75	11.23	12.50
12"	12.75	13.20	15.30	13.33	12.75
14"	14.00	15.30	18.00	15.47	13.50
16"	16.00	17.40	20.00	17.57	13.75
18"	18.00	19.50	22.00	19.67	13.75
20"	20.00	21.60	24.00	21.77	15.00
24"	24.00	25.80	28.00	25.97	16.00

**Connections to 14” & 16” IPS PVC require two piece retaining gland (not shown). 18” and larger IPS PVC not recommended.
**Sizes larger than 12” require customer supplied All-Thread and nuts. 9” long T-bolts are included with all kits 12” and smaller.
Other sizes and DR’s not listed are available - Call For Quick Quote

1-800-499-6927

Page 10 - 4

www.indpipe.net